



Performance

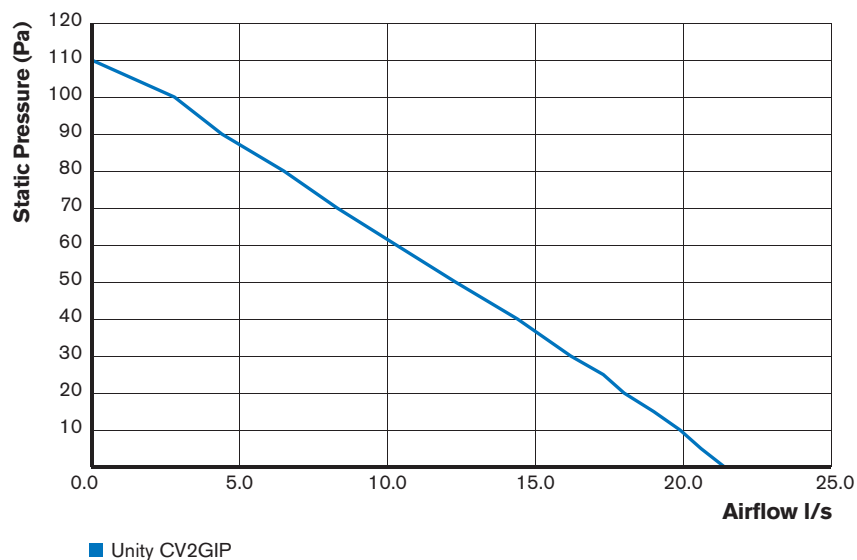

Dimensions

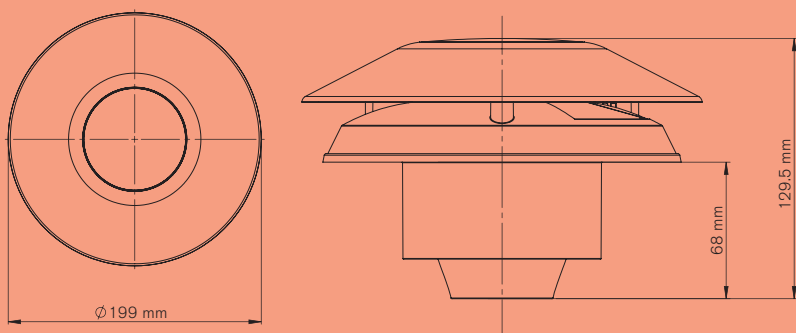

Performance Settings

Unity CV2GIP One Fan, Any Room		Airflow Performance l/s		Energy Consumption W	
	Bathroom (default)	Kitchen (default)	Minimum	Maximum	
Trickle Speed	5	8	1.1	4.1	
Boost Speed	8	13			
Max	21				

For Noise data, please contact Technical Services on 01903 777135

Physical Specification and Installation

Wiring:	Must comply with IEE Regulations
Fuse:	3 amp normally required (when fan is supplied from a 6A lighting circuit no local fuse is required)
Finish:	Satin Finish
Material:	ABS
Electrical Specification:	220-240V ~ 50Hz Class II
Consumption:	Min 1.1W - Max 4.1W

Unity: Environmental

Ancillaries



SP13 PVC round pipe
100mm \varnothing x 350mm.



EG1 Complementary fixed blade louvred grille in semi-matt ABS plastic, UV stabilised. Choice of white or brown grille.



GD8 Modular light weight PVC ducting system.



GG42 External louvred wall vent available in white or brown.



Flexiduct Flexible 100mm PVC and aluminium ducting.